

Extractor


Bend from 28mm long strip of 5mm wide steel (2mm thick) to profile below



The Box Tube MAC-11

Part 2

Bolt and receiver modifications

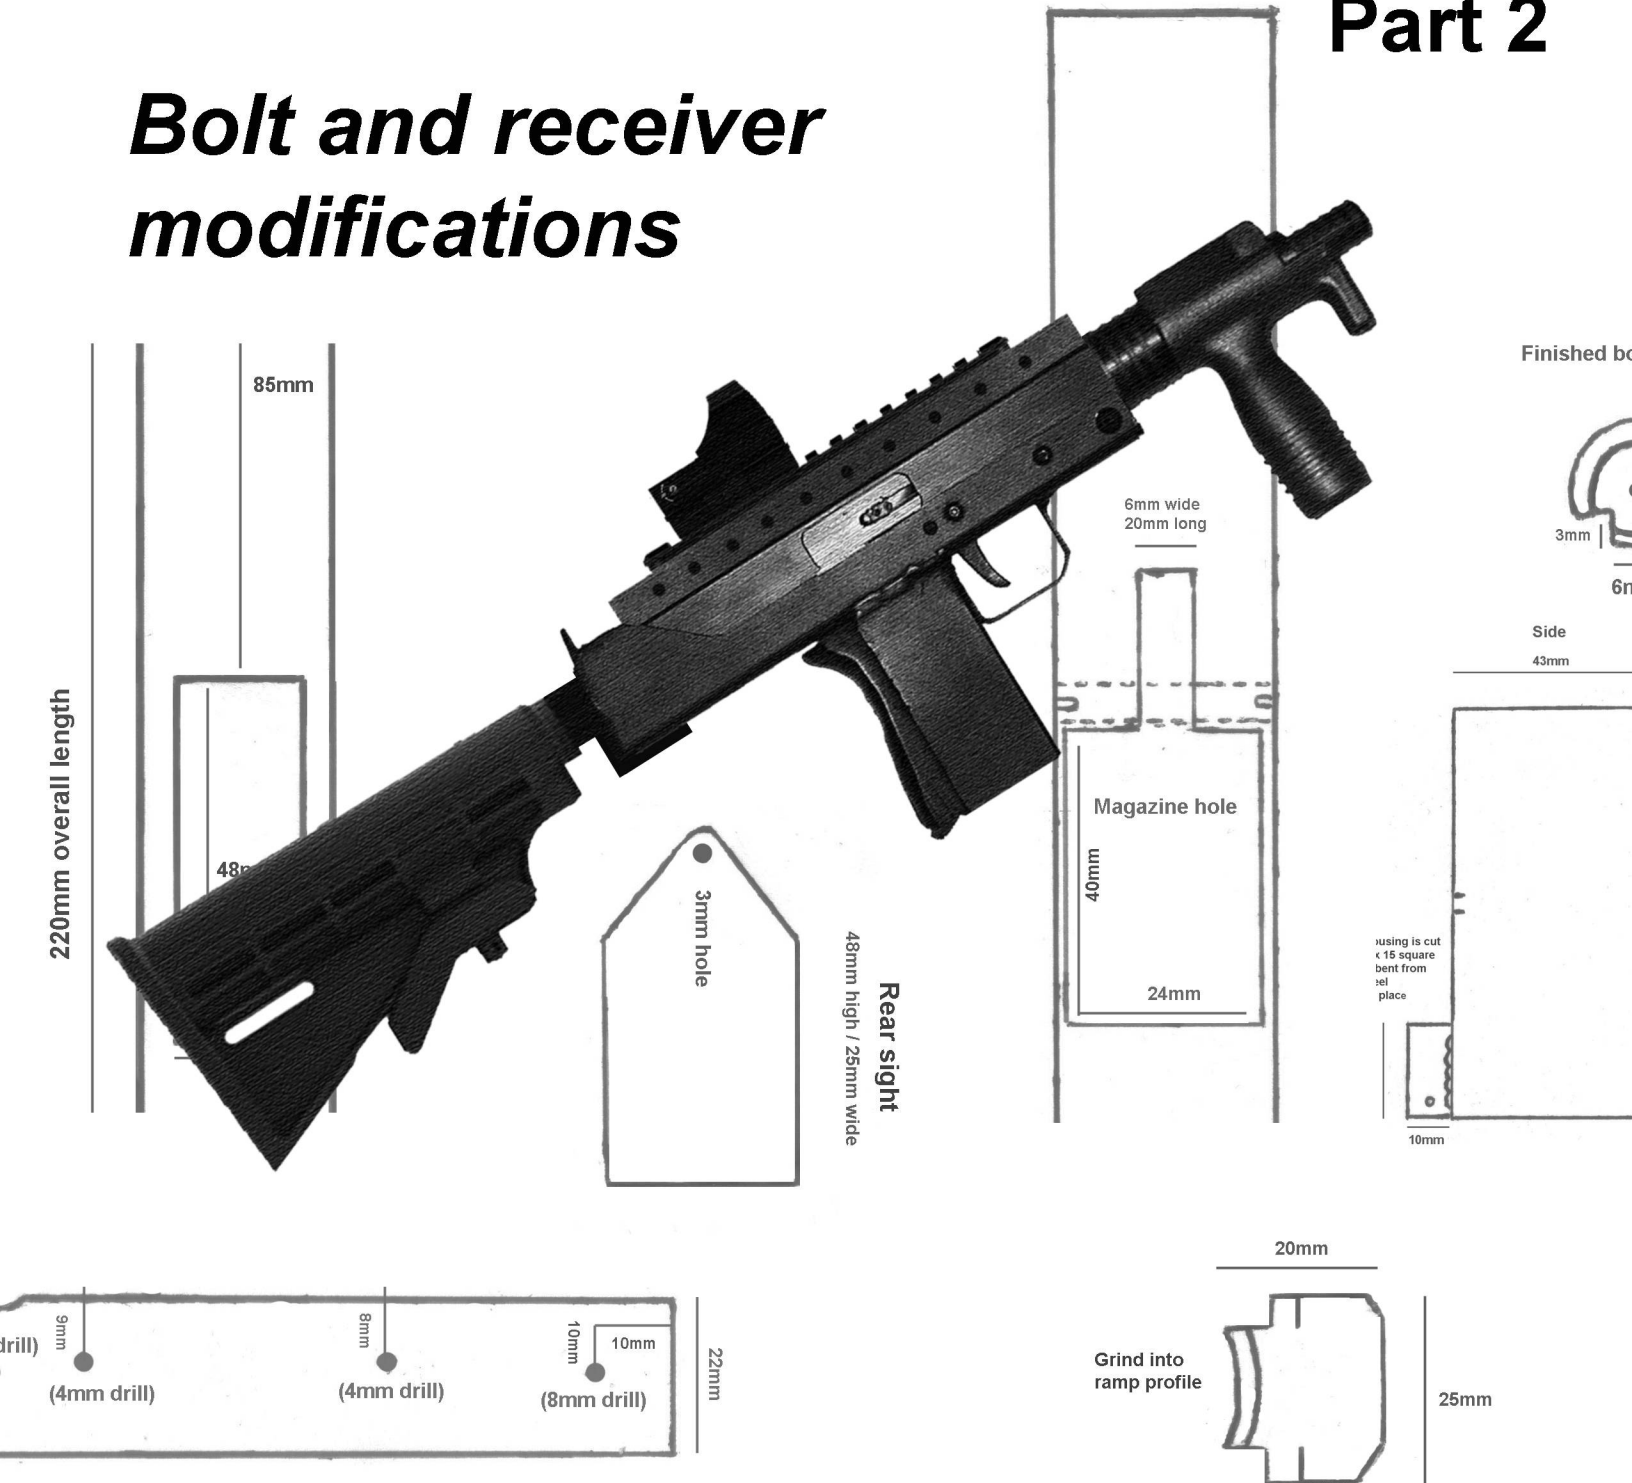

Practical Scrap Metal Small Arms Vol.5

By Professor Parabellum

Introduction


The information and plans contained herein expand upon adding additional bolt weight to the original Box Tube MAC-11 design described in Vol.2 as well as straight forward modifications to the receiver allowing alternative bolts of greater mass to be incorporated without changing the original receiver material specifications.

*For legal purposes, the demonstration prototype shown in both part 1 & 2 of this publication was built as a legal non-firing dummy replica. It's dummy barrel is completely destroyed, blocked and permanently welded in place as well as it's bolt having no provisions for a firing pin. **This document is for academic study purposes only.***

Tungsten inserts



Tungsten is a very dense material, approximately 1.7 times more so than lead. A tungsten weight will weigh nearly twice as much as a lead weight of the same size making it an ideal material to use for bolt inserts. The micro UZI for example uses this method to achieve optimum bolt weight within a very small package. A heavier bolt will also result in a more desirable reduced rate of fire.

A 3oz (85g) tungsten weight measures 9.5mm x 12mm. Drilling a 3/8" (9.5mm) wide, 48mm long hole in the bolt piece will allow the insertion of four 3 ounce (85g each) weights totalling 340g. When the bolt is cocked all the way back, the hollow middle area of the compressed recoil spring will still allow for 30mm more material to protrude out of the rear of the bolt. Considering this, a further two more weights can be added contained in a welded on piece of 13mm steel tubing. A larger cocking handle can also serve to hold extra weight, especially if made using successive tubing telescoped over it into which additional tungsten weights can be placed. Using this method one can expect to attach almost 600g of tungsten. A bolt made in this manor can potentially weigh over 700g, taking into account the displaced steel. **Keep in mind, the original M11-9 bolt weighs only 440g.**

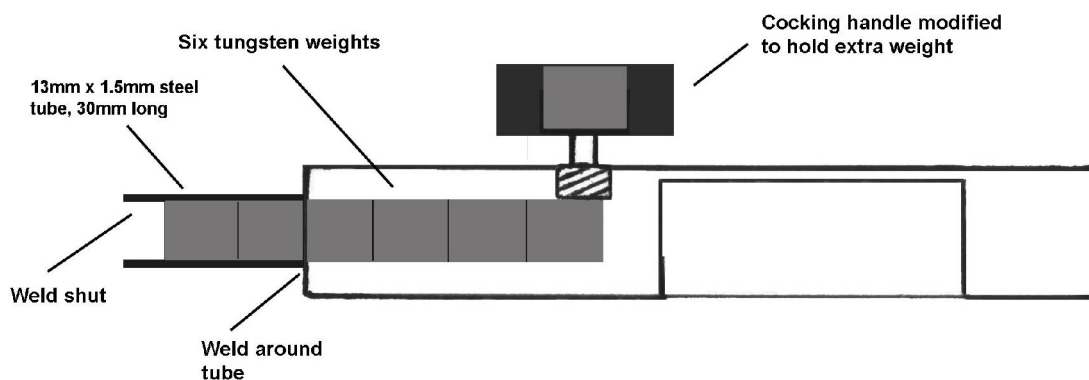

Even without drilling the bolt for inserts and instead relying on a rear portion containing two 3oz weights and a large cocking handle containing another two 3 oz weights, approximately 550g of overall bolt weight will be achieved. Optionally the recoil spring can also be shortened allowing for a slightly longer bolt with more space to fill with tungsten.

Another simple and highly effective way to attain more weight is to weld on a section of hollow tube on top of the bolt which protrudes through an enlarged cocking handle slot. This tube can be filled with tungsten weights or even enough molten lead to be sufficient. Approximately ten 3oz tungsten weights will fit in a 12mm x1.5mm steel tube the same length as the bolt (5") allowing potentially 850g of extra weight. Serrations can be made into this piece of tubing allowing it to also serve as a cocking handle. Using lead to fill the tube, a sufficient bolt weight of over 600g will be achieved without any additional inserts. It is important that the recoil spring selected is almost fully compressed when the bolt is cocked back so that the weighted section cannot slam into the top of the lower receiver.

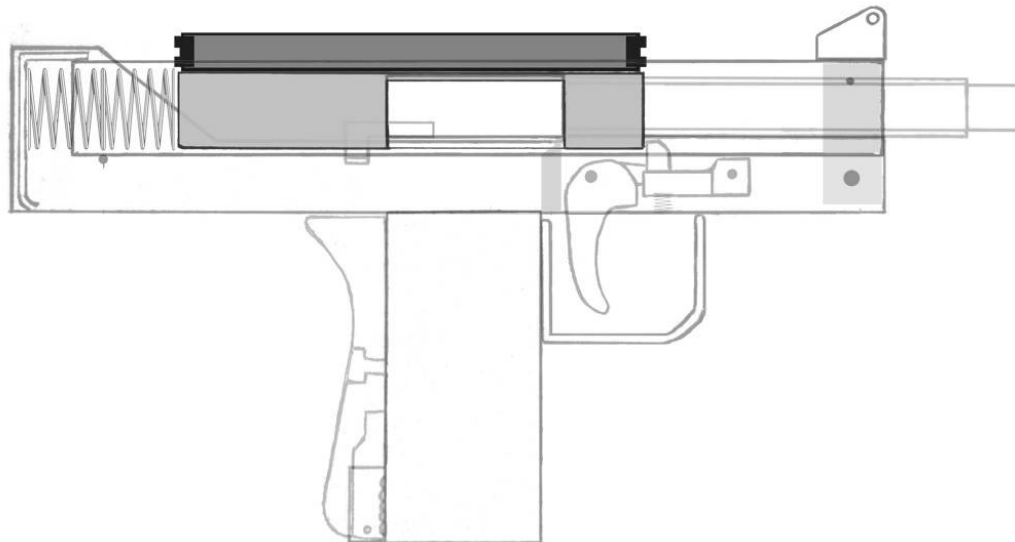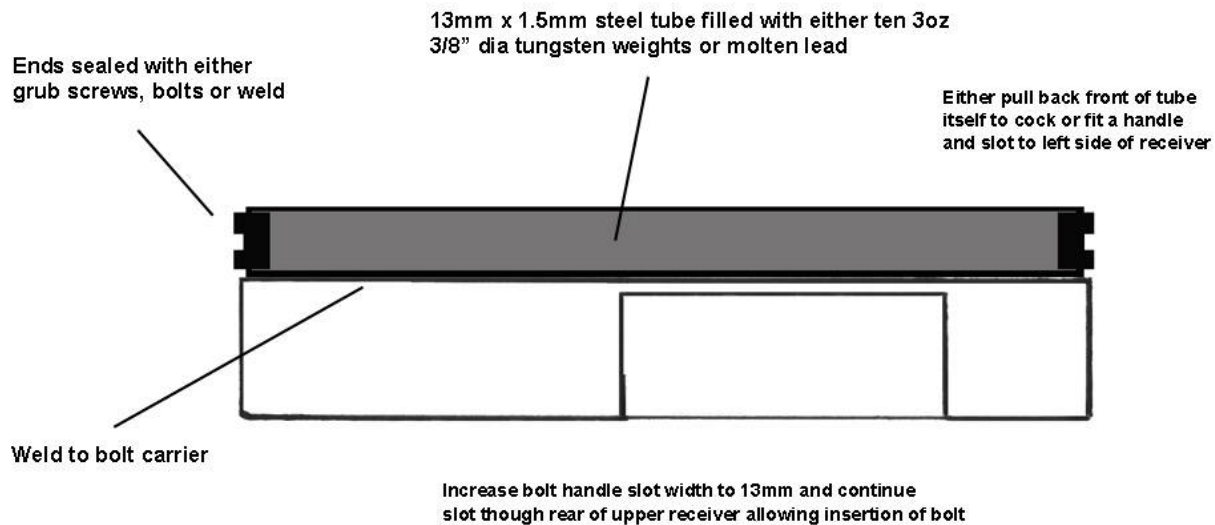


Submachine guns and their bolt weights


Submachine gun	Cartridge	Bolt weight
SWD M11	9x19	440g
STEN MKII	9x19	635g
PPS43	7.62 x 25	560g
PPSH41	7.62 x 25	590g
UZI	9x19	680g
Lusa	9x19	482g
VZ61	.32 ACP	230g
Micro UZI	9x19	408g

All steel bolt method

Though tungsten weights or lead will be preferable and more than sufficient to weight a bolt, an alternative method would be to attach extra mass in the form of two steel plates or a square bar to the bolt. As before, the original cocking handle slot on the receiver is enlarged to allow insertion of the bolt and the handle itself mounted to the side of the receiver instead. An optional housing cover made from a section of square tube will allow for convenient placement of a red-dot or laser sighting system via a Picatinny rail.

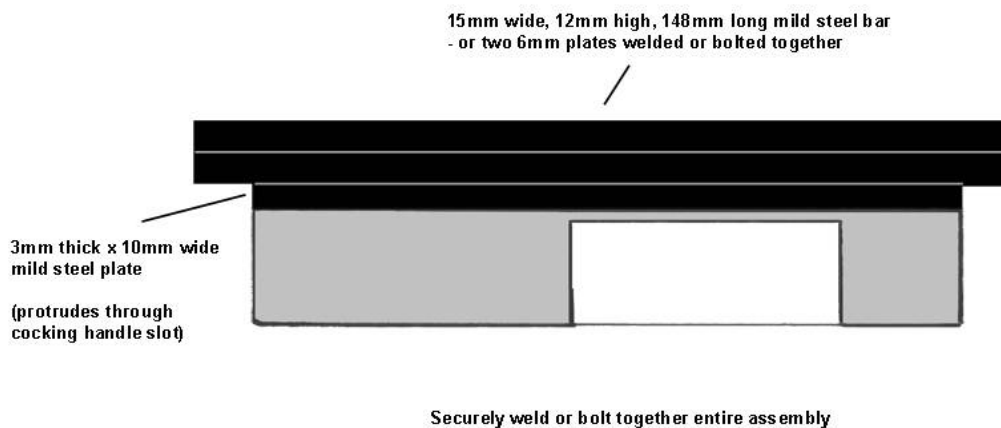

Heightened steel bolt inserted into receiver with added cover:

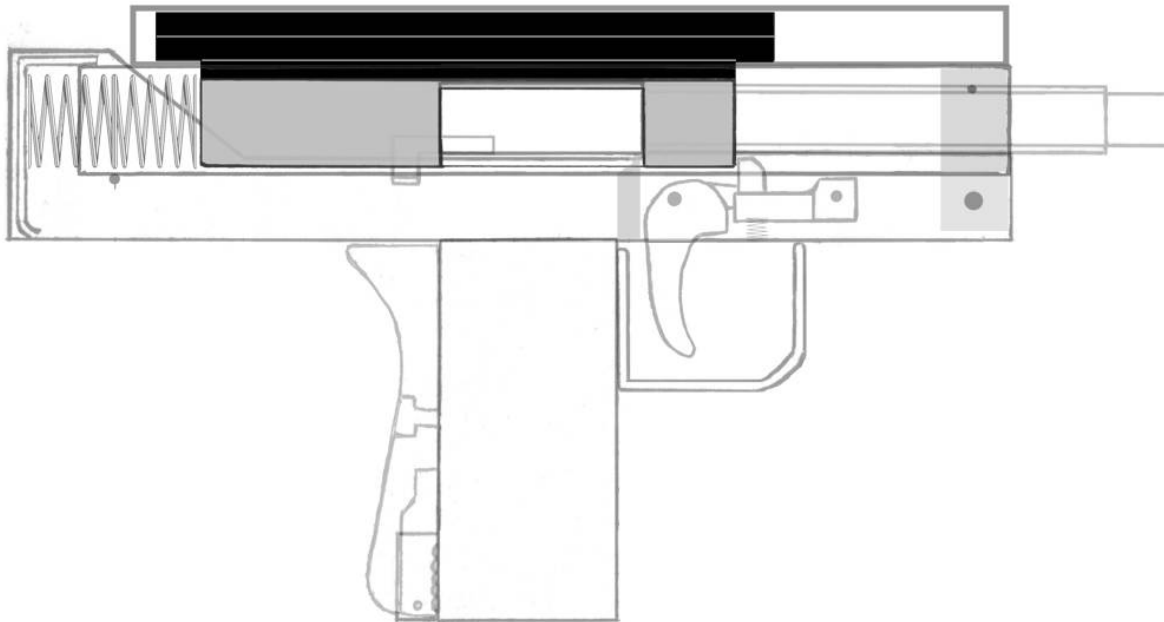


Plans

Full plans from part 1 are included alongside additional modifications. All pages included should be printed out on 8.5 x 11 US letter paper. Each component template is drawn to scale and can be cut out and glued to their respective thickness of material. Make sure the ruler at the bottom left of each sheet is 2 inches in length. Alternatively, enlarge the plans using a computer program until the ruler is the correct length, then trace the parts needed onto a sheet of paper taped over your computer's screen.


Weighted bolt 2

Bolt carrier

Cut from a 129mm length of 20mm x 20mm (2mm wall) steel box tube
Cut out lower wall

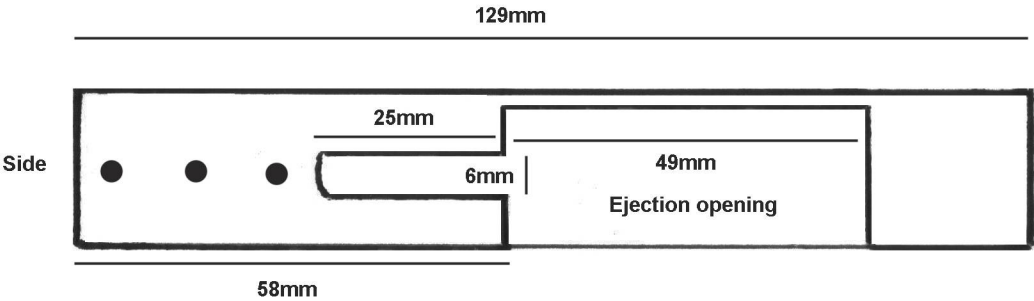

Insert up to ten 3oz 3/4" tungsten weights (9.5 x 12mm) or fill with molten lead
- Thread each end with a 12mm tap for two 12mm grub screws

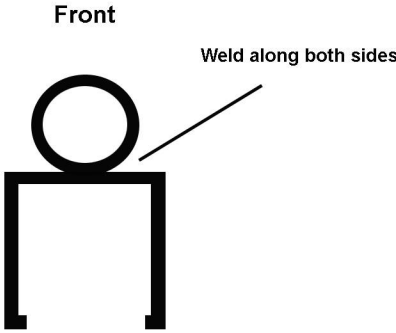

2 inches


Weighted bolt 3

Mild steel strip - 3mm thick, 10mm wide, 129mm long



Drill 4 or 5 holes through strip and weld through while ontop of bolt carrier

Two 6mm steel plates, 12mm high x 15mm wide, 148mm long
or single 12mm x 15mm steel bar



Weld or secure assembly together using four or five bolts




Front



2 inches

Modified upper receiver


Bolt cover

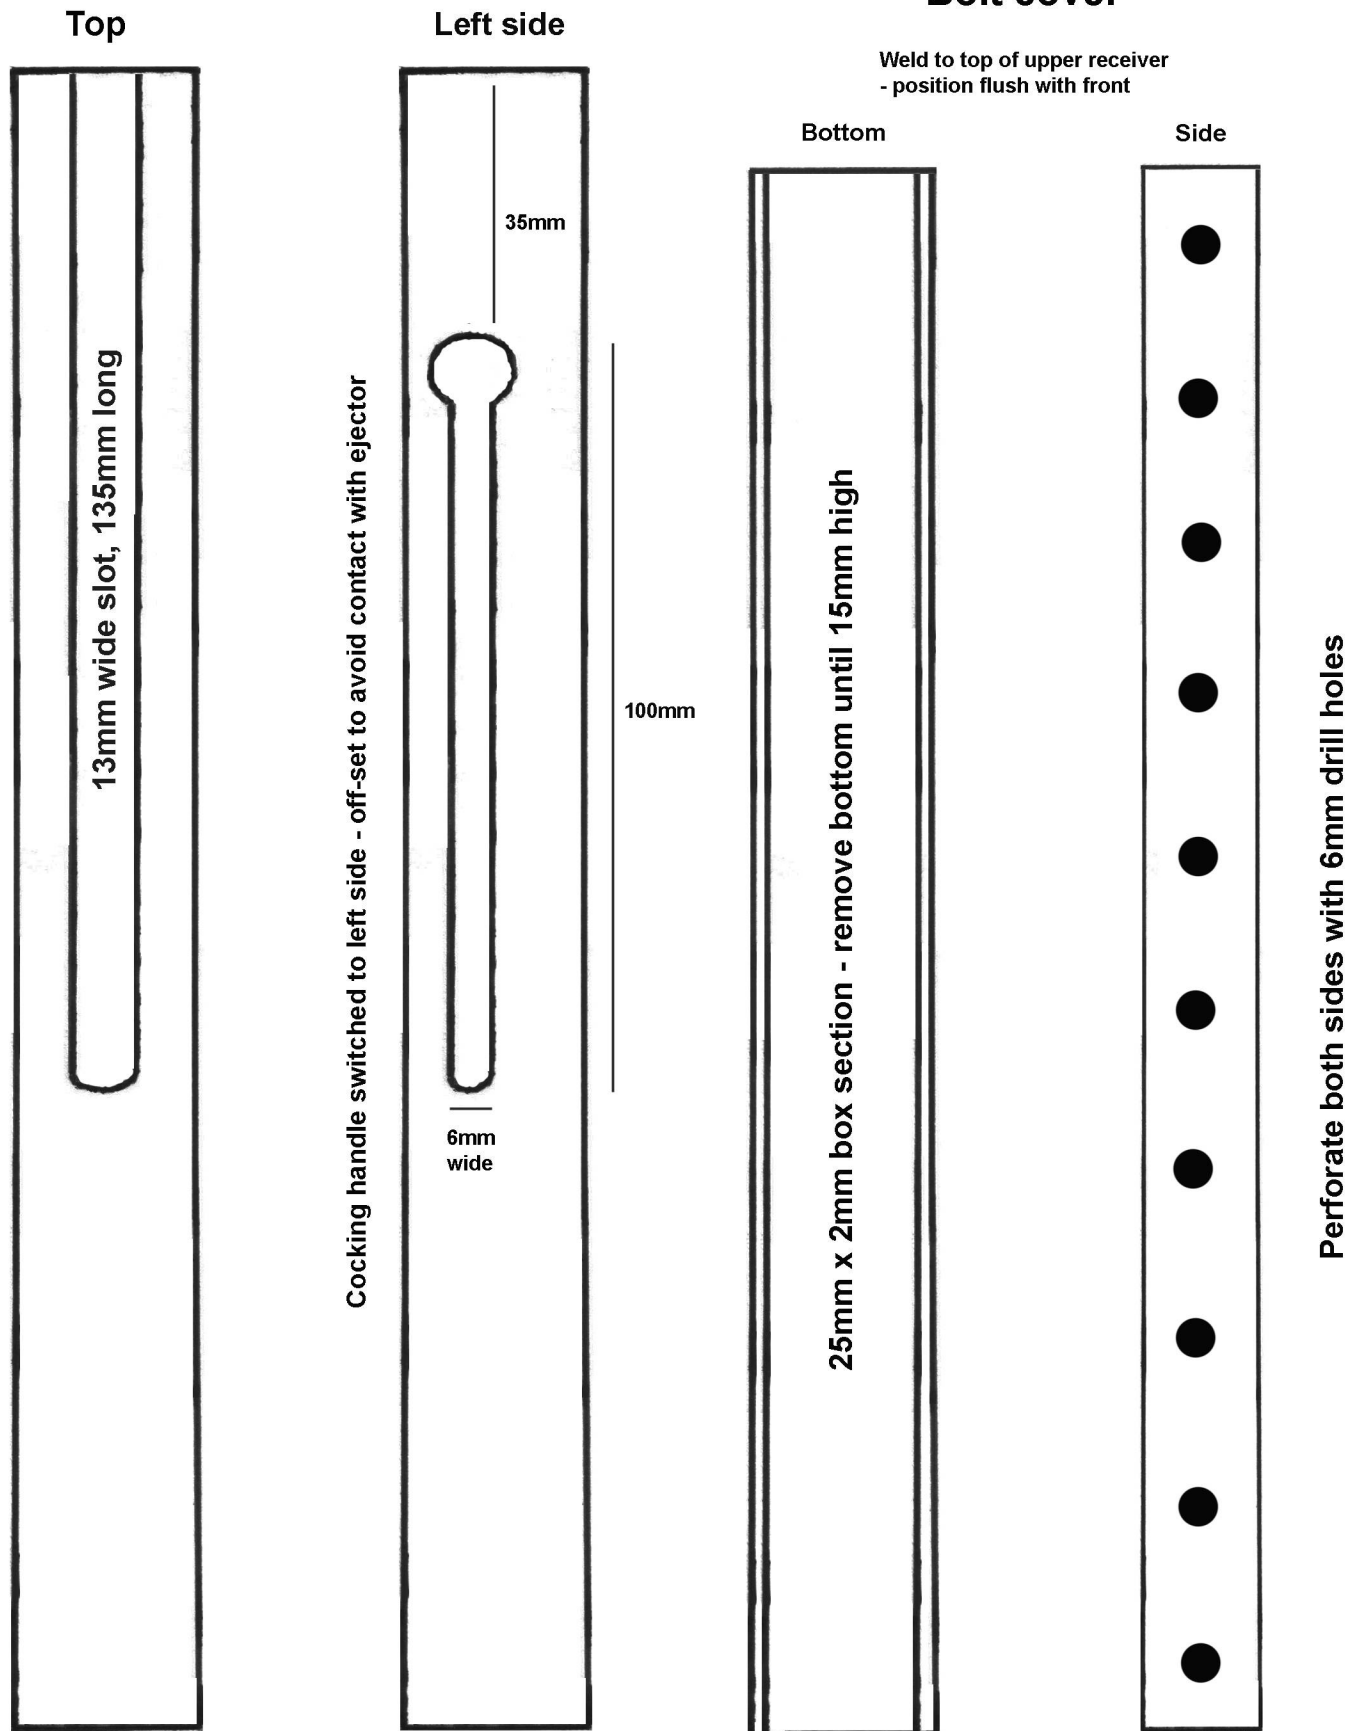

2 inches

.32 / .380 / 9x18 magazine*For display purposes only!*

Rather than hand winding a magazine spring, a 12mm wide, 2.5" long tension spring can be stretched out to form a very long compression spring suitable for use in such a small ID magazine.

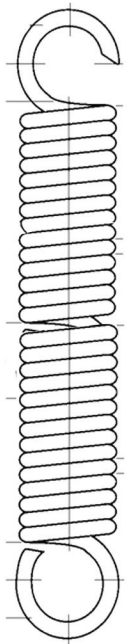

Hold both ends using pliers in each hand - stretch out until a consistent compression spring is formed. Snip both ends once complete.

A magazine spring produced in this manner will work reliably providing it is used in 30mm x 15mm tube sizes or smaller.

File to ramp shape

111mm

Cut away a 6mm section from back

Bend lips inwards evenly until both tips retain a cartridge
- sand edges smooth

Base plate - 12mm x 27mm steel strip
- secure with two pins


Steel tube
15mm x 30mm
x 1.5mm wall

7" long

Weld or epoxy a 3" long, 4mm thick steel strip to the upper half of the back of the magazine tube to fit in a magazine-well made from 40mm x 20mm x 2mm tube.

Follower

Bend from 90mm long steel strip
10mm wide x 2mm thick




2 inches

Print on 8.5x11 US letter paper

Magazine tube : 15mm x 30mm x 1.5mm mild steel tube
Follower and base plate : 2mm thick mild steel sheet

Upper receiver


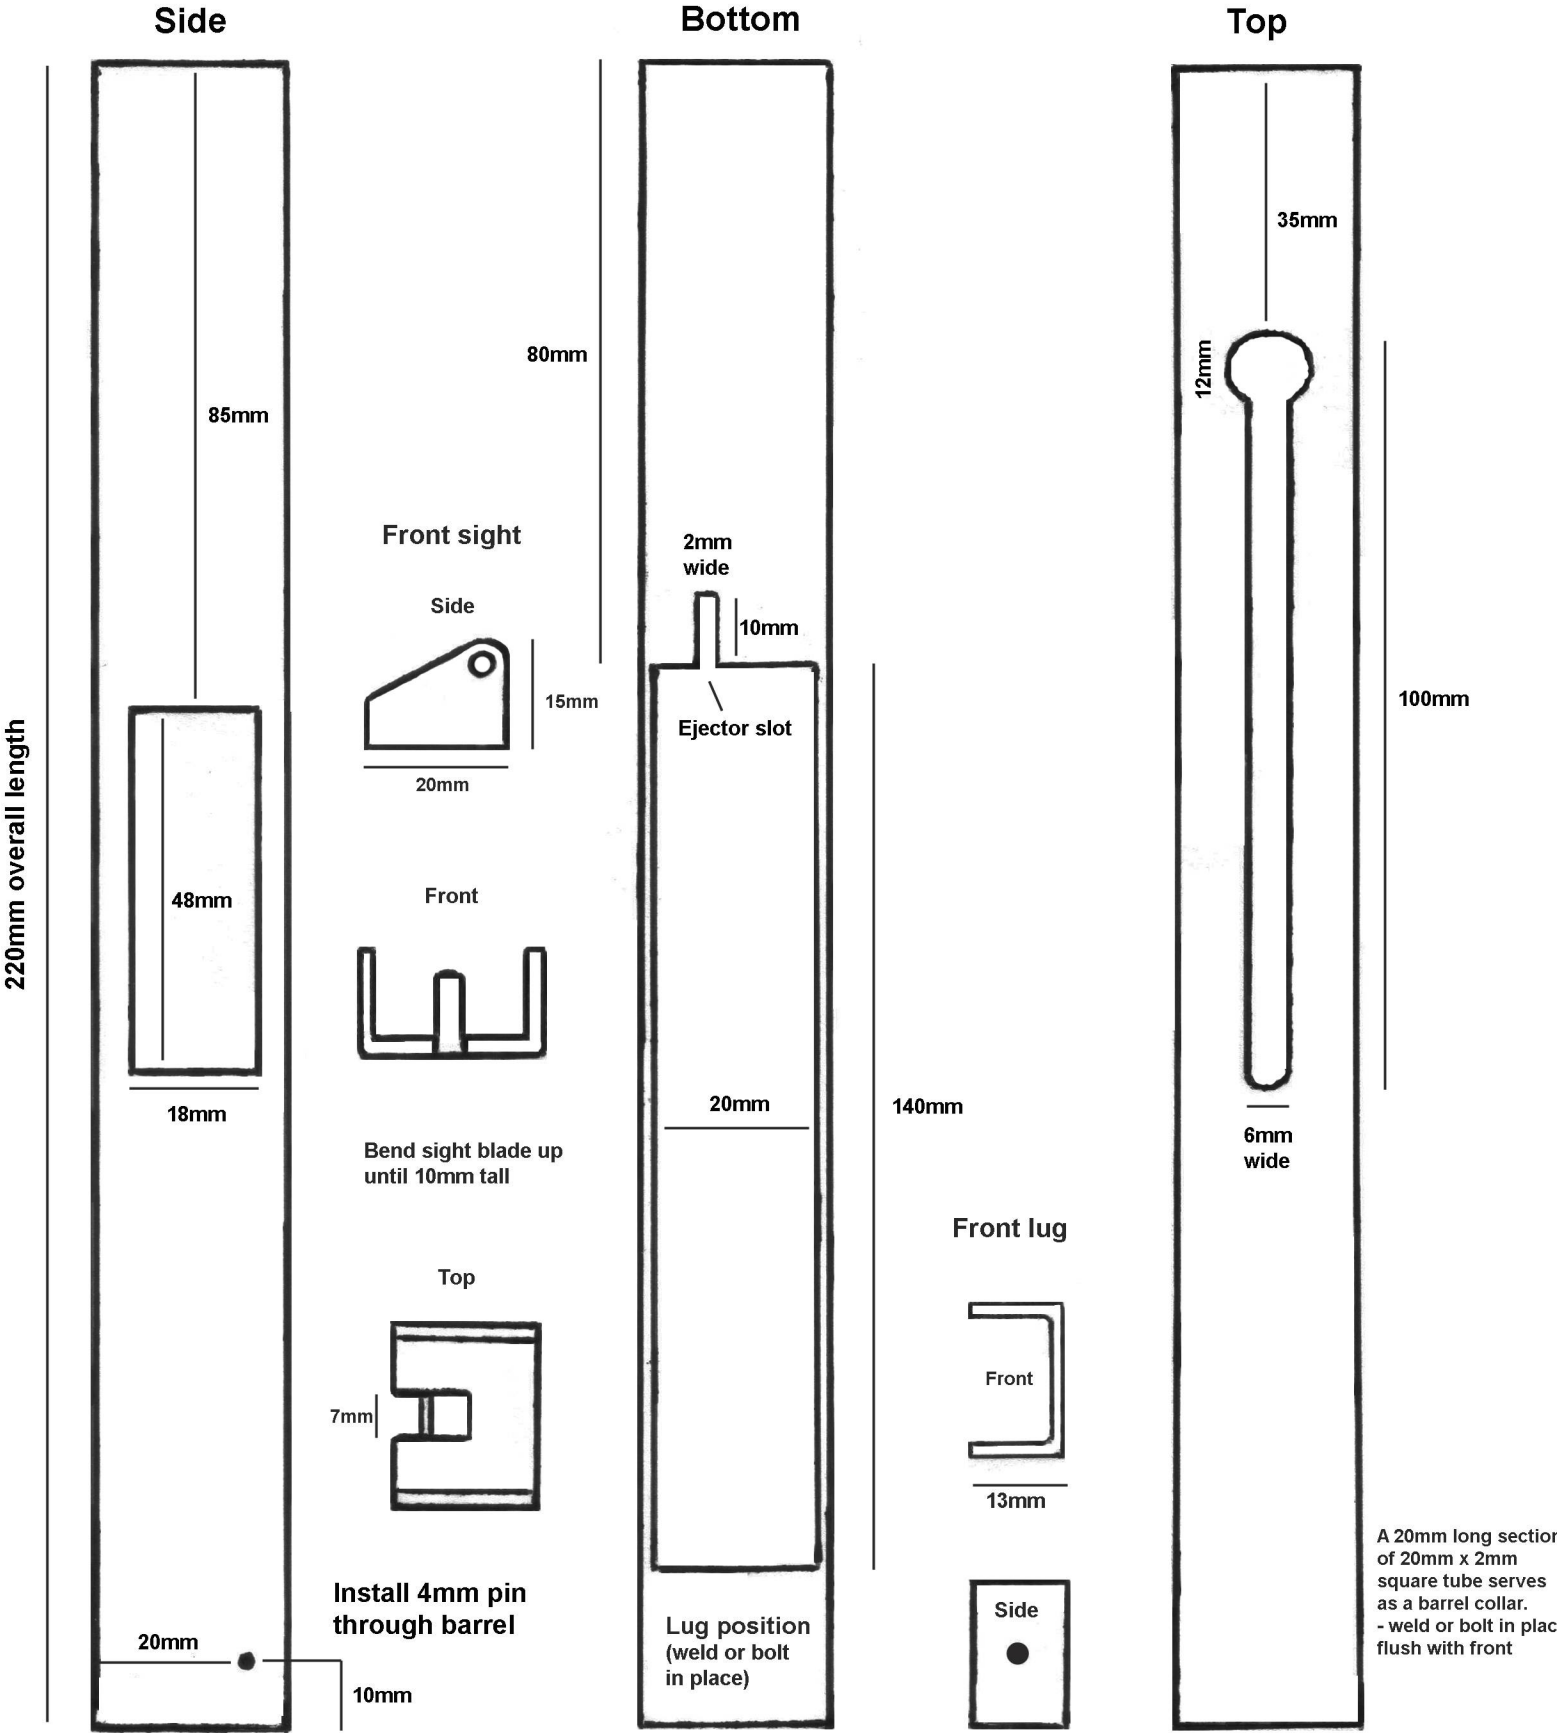


2 inches

Cut lug from 25mm box tube
- Drill with 7mm bit and tap to accept two m8 bolts


Lower receiver

The Box Tube MAC-11 - The Ultimate DIY Machine Pistol

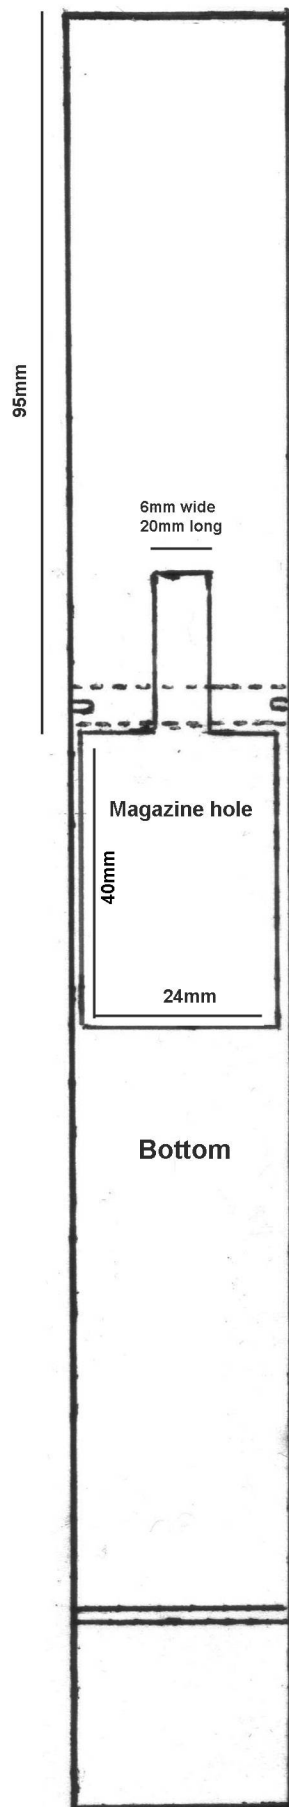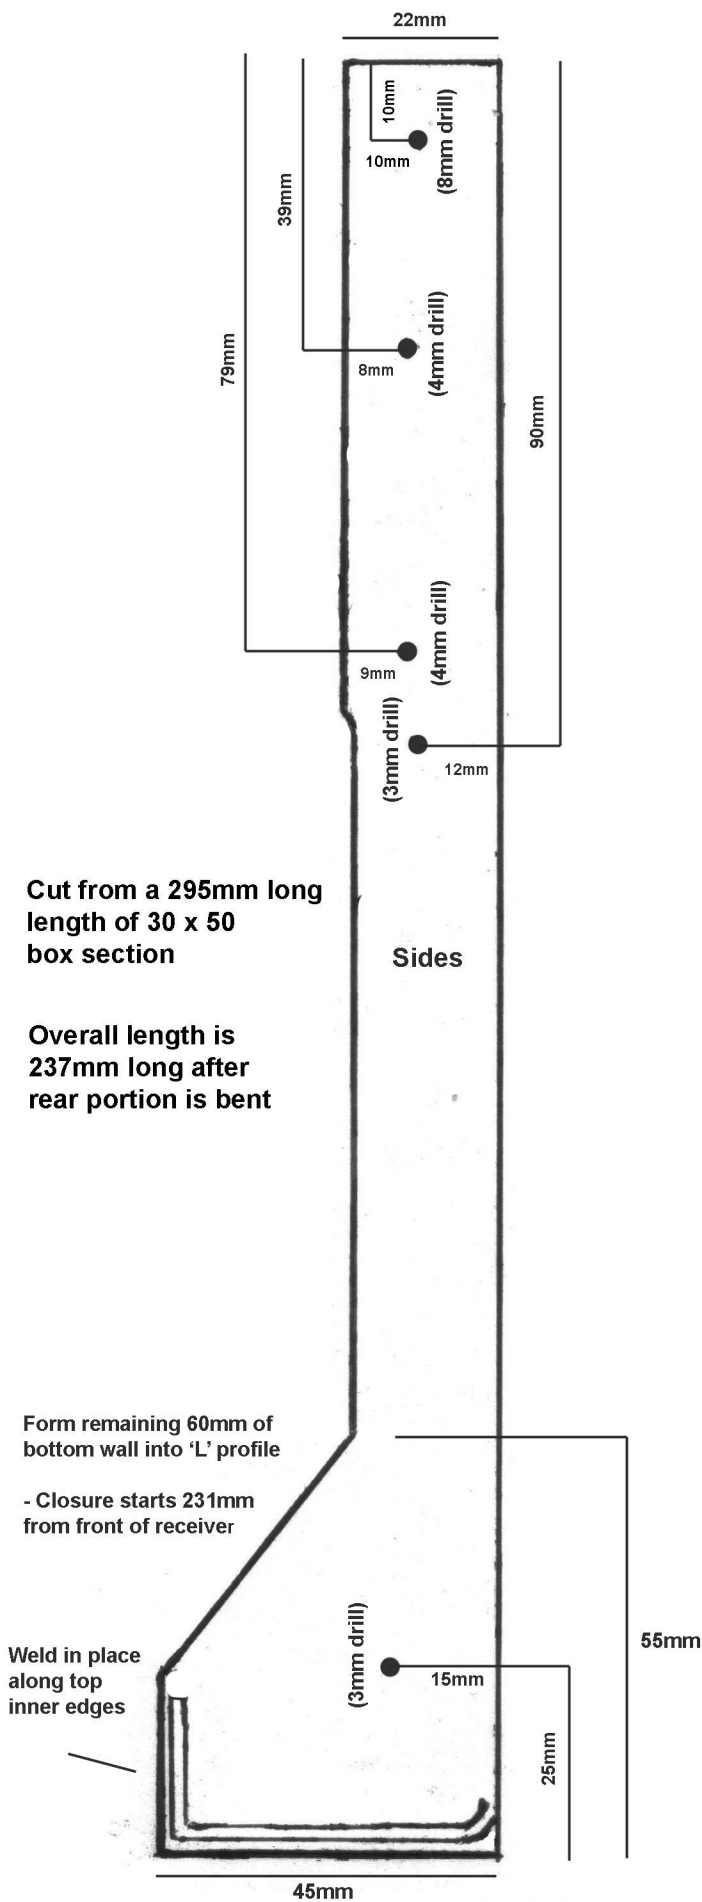


Trigger guard

Bend from 100mm long steel strip to profile




Feed ramp

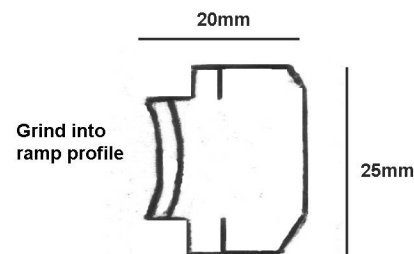

Attach to lower receiver using two m3 bolts through both sides

Rear sight

48mm high / 25mm wide

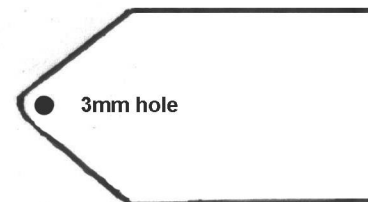


Position sight 15mm up from bottom of lower receiver - weld in place along sides

2 inches


Print on 8.5x11 US letter paper

Lower receiver: 30mm x 50mm (2mm wall) mild steel box section
Rear sight & trigger guard: 14 gauge (2mm) mild steel sheet
Feed ramp: 1/4" (6mm) thick steel or aluminum plate

Magazine well

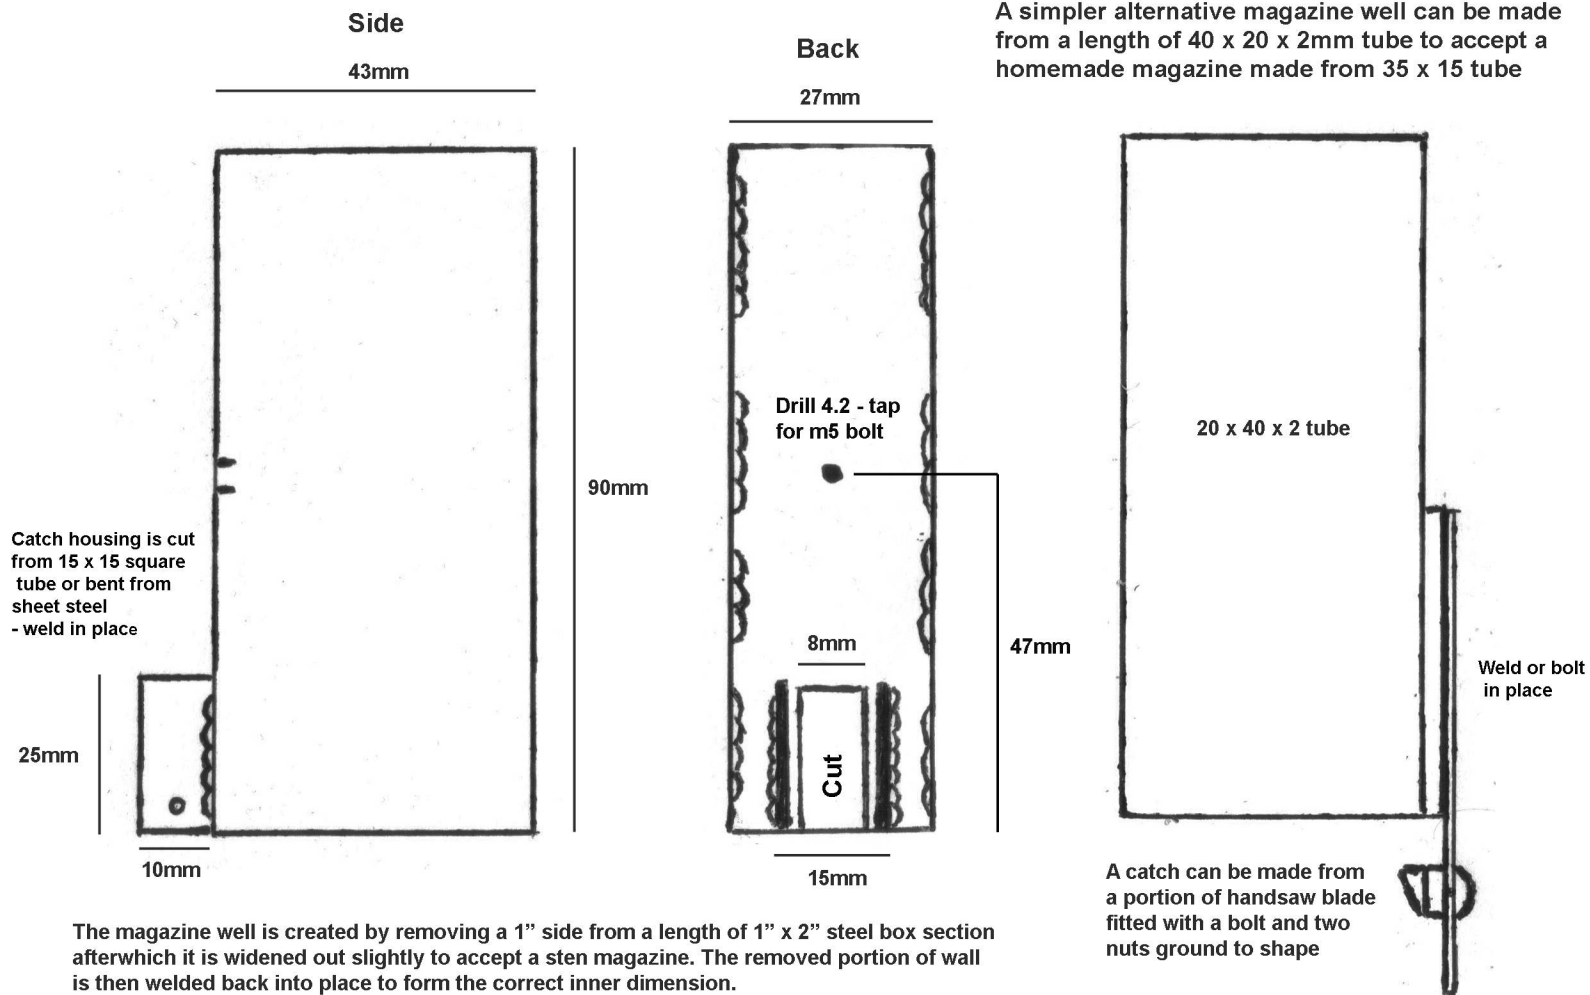


Mag catch



Secure with 15mm long pin

Grip

1" thick wood or plastic

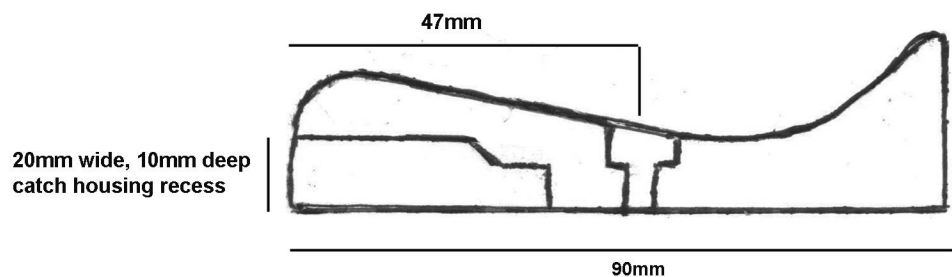

2 inches


Print on 8.5x11 US letter paper

Sten magazine well : 1" x 2" (50 x 25 x 1.5mm) steel box section
Catch housing : 16 gauge (1.5mm) sheet or suitable steel box section
Magazine catch : 3/8" (10mm) steel or aluminum plate


Bolt

Bolt carrier

Cut from a 129mm length of 20mm x 20mm (2mm wall) steel box tube
Cut out lower wall

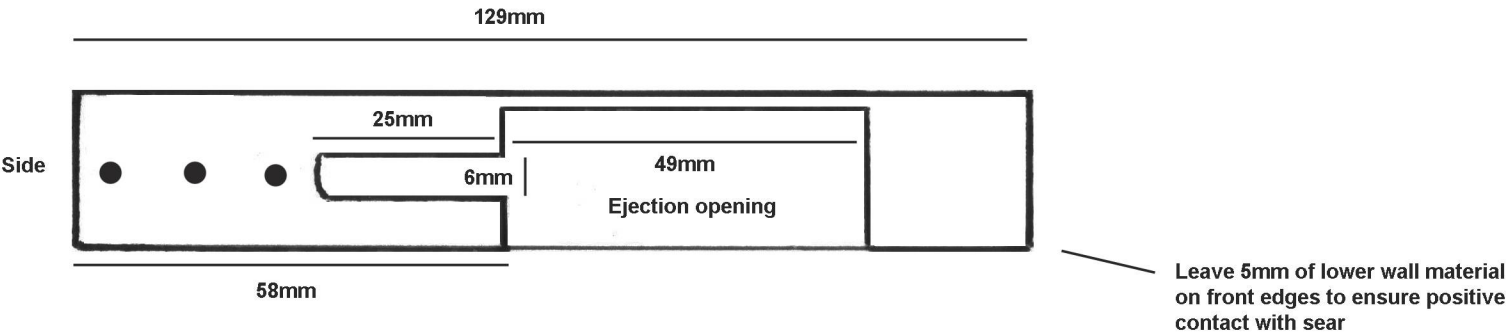


Mount bolt piece using three 6mm mild steel bars or weld in place

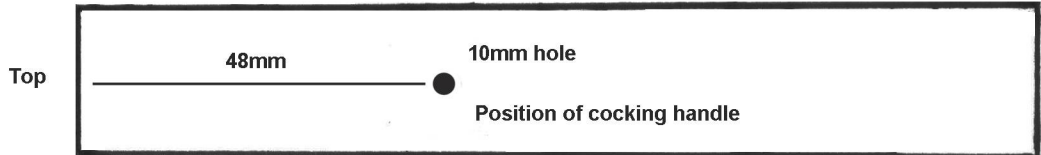

Bolt handle


Modified m10 bolt
(grind down upper 5mm)



Alternatively tap bolt carrier to accept an unmodified m6 bolt


Bolt piece

Cut from a 58mm length of 5/8" (16mm) steel bar stock



- Drill center with 10mm drill bit until 3mm deep
- Grind flat with 10mm drill bit with tip removed using angle grinder
- Bevel edges slightly with 16mm+ drill bit or dremel

Finished bolt face profile



Grind feeding cuts using angle grinder fitted with 2mm grinding disc for entire 58mm length.

Cut ejection slot using angle grinder fitted with 1mm slitting disc until 7mm deep. Widen if necessary.

Extractor

Bend from 28mm long strip of 5mm wide steel (2mm thick) to profile below




2 inches


Trigger group & ejector

Cut trigger and sear from 10mm thick aluminum or steel plate


Trigger

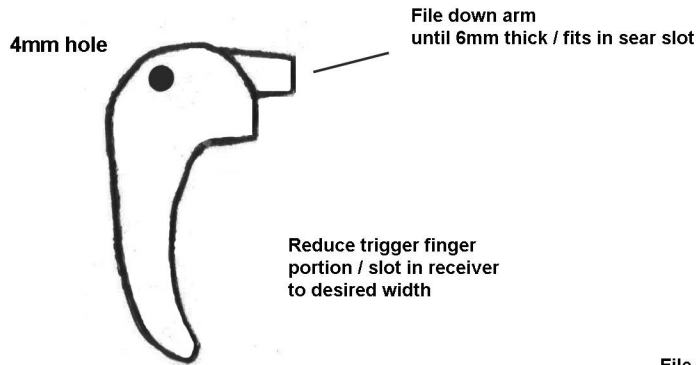

Sear

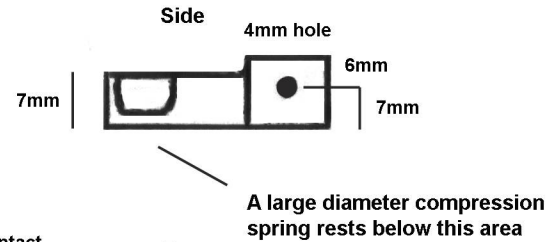


File down trigger contact point until ramp profile

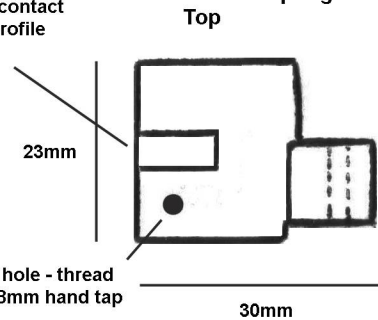

Sear tooth can be tapped into either side or both - hand fit until smooth functioning

Finished trigger group

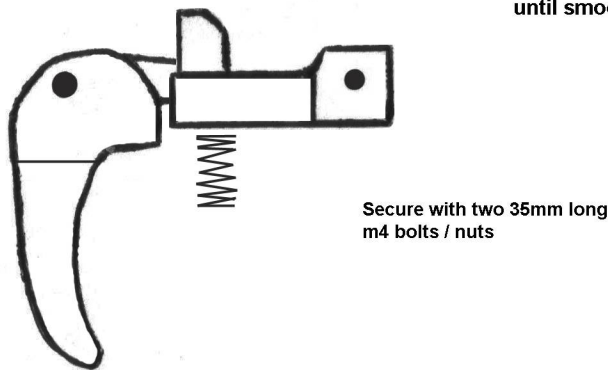


Tap hole with m8 bolt for sear tooth - cut off excess and grind to required profile

Ejector


Side

Front

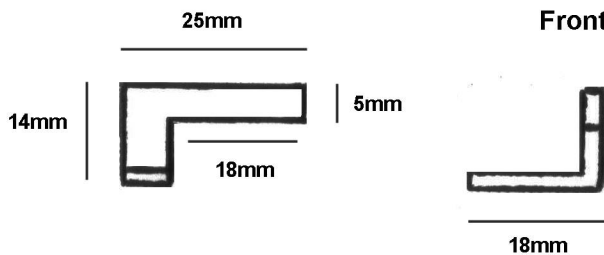

Bend from 2mm steel sheet

Finished ejector profile



Insert into ejector slot on upper receiver - Bolt or weld in place

2 inches

Print on 8.5x11 US letter paper


Trigger and sear: 10mm thick aluminum or steel plate
Ejector: 14 gauge (2mm) thick mild steel sheet

Barrel and magazine

Barrel


(Non-functioning dummy)

135mm

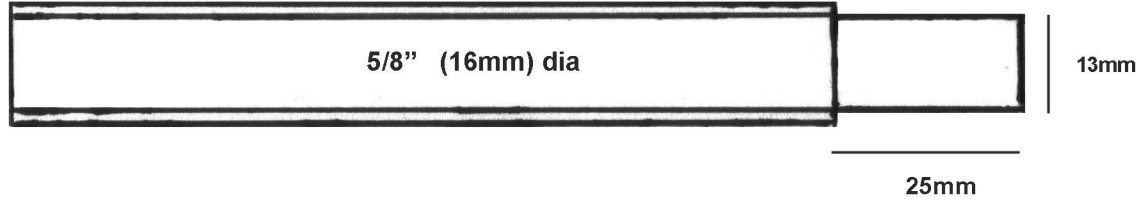


Sling / hand strap mount

Weld in place or attach via circlip

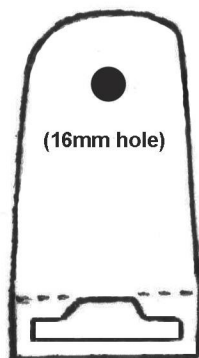

Follower

Bend from 90mm long
10mm wide metal strip



2 inches

File to ramp
shape

Homebuilt magazine

Secure with 2 pins and a
12mm x 32mm steel strip

90mm long, 12mm wide
steel strip - bend and
epoxy or silver solder
in place

35mm x 15mm tube
7" long

18mm long section
of 5mm steel bar
or bolt - epoxy or
silver solder into rib

Wind 20 gauge spring
steel wire around a 15" long
24mm x 8mm bar to form
magazine spring.

- Leave 15mm between
each turn until
12" in length.

Bend lips inwards
until 9mm across

Cut 6mm

STEN magazine modifications

116mm
(New mag-stop
placement)

Remove
stop tabs

For more...

